



Weight Optimization & Material Saving Of The Roller Conveyor System

Suhas M. Shinde

PG student

Jawaharlal Nehru College of Engineering, Aurangabad, India.

Prof. R.B. Patil

Associate Professor

Jawaharlal Nehru College of Engineering, Aurangabad, India

Abstract:

Over the years a lot of work has done and is still continuing with great effort to save weight and cost of applications. The current trend is to provide weight/cost effective products which meet the stringent requirements. The aim of this paper is to study existing conveyor system and optimize the critical parts like roller, shafts, C-channels for chassis and support, to minimize the overall weight of assembly and material saving.

Key Words: *Optimized design, APDL programming, material handling systems.*

Introduction

Conveyors

A conveyor system is a common piece of mechanical handling equipment that moves materials from one location to another. Conveyors are especially useful in applications involving the transportation of heavy or bulky materials. Conveyor systems allow quick and efficient transportation for a wide variety of materials, which make them very popular in the material handling and packaging industries. Many kinds of conveying systems are available, and are used according to the various needs of different industries. There are chain conveyors (floor and overhead) as well. Chain conveyors consist of enclosed tracks, I-Beam, topline, power & free, and hand pushed trolleys. Conveyor systems are used widespread across a range of industries due to the numerous benefits they provide.

- Conveyors are able to safely transport materials from one level to another, which when done by human labor would be strenuous and expensive.
- They can be installed almost anywhere, and are much safer than using a forklift or other machine to move materials.
- They can move loads of all shapes, sizes and weights. Also, many have advanced safety features that help prevent accidents.



Figure 1: Conveyor Systems

There are a variety of options available for running conveying systems, including the hydraulic, mechanical and fully automated systems, which are equipped to fit individual needs.

Conveyor systems are commonly used in many industries, including the automotive, agricultural, computer, electronic, food processing, aerospace, pharmaceutical, chemical, bottling and canning, print finishing and packaging. Although a wide variety of materials can be conveyed, some of the most

common include food items such as beans and nuts, bottles and cans, automotive components, scrap metal, pills and powders, wood and furniture and grain and animal feed. Many factors are important in the accurate selection of a conveyor system. It is important to know how the conveyor system will be used beforehand. Some individual areas that are helpful to consider are the required conveyor operations, such as transportation, accumulation and sorting, the material sizes, weights and shapes and where the loading and pickup points need to be.

Types of Conveyor Systems

- Gravity Conveyor systems
- Powered Belt Conveyor systems
- Pneumatic conveyor systems
- Vibrating conveyor systems
- Flexible conveyor systems
- Vertical conveyor systems and spiral conveyors
- Live Roller Conveyor systems

Problem Definition

The aim of this project is to redesign existing gravity roller conveyor system by designing the critical parts (Roller, Shaft, Bearing & Frame), to minimize the overall weight of the assembly and to save considerable amount of material.

Gravity roller Conveyor has to convey 350 kg load, 30 inch above ground and inclined at 4 degree. Fig. 2.1 shows roller conveyor assembly.

Components of conveyor are as follows,

Sr. No.	Component	Material	Qty.
1	C-Channels for Chassis	ISMC 100	2
2	Rollers	Mild Steel	15
3	Bearing	Std.	30
4	C-Channels for Stand	ISMC 100	4
5	Shaft	Mild Steel	15

Table 1

Design roller conveyor to reduce weight.

Objective of the Study

The following are the objectives of the study:

1. Study existing roller conveyor system and its design.
2. Geometric modeling of existing roller conveyor.
3. To generate parametric model using ANSYS Parametric Design Language (APDL) program.
4. To carry out linear static, modal, transient and optimization analysis of existing roller conveyor.
5. Modification of critical conveyor parts for weight optimization.
6. To carry out Analysis of Modified design for same loading condition.
7. Recommendation of new solution for weight optimization.

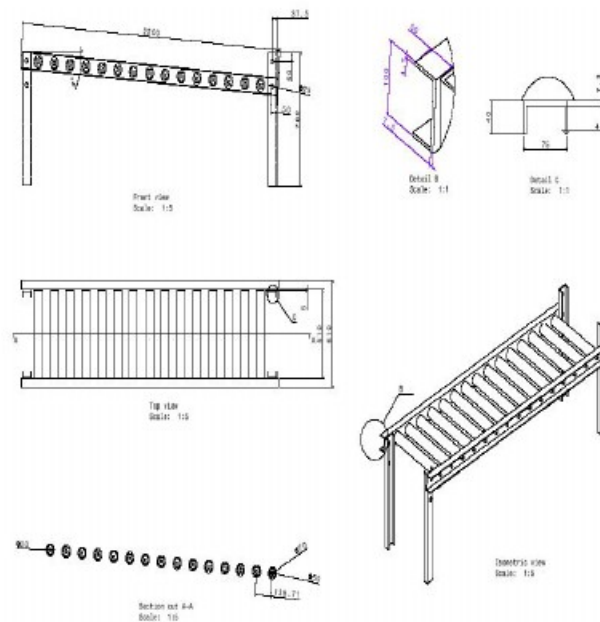


Figure 2: Gravity Roller Conveyor Assembly

Scope of Present Study

1. Check design of existing conveyor system.
2. Simulation method applied to optimize parameters web thickness, flange thickness, web height, roller thickness and shaft diameter.
3. ANSYS APDL codes applied for linear static, modal, transient and optimization analysis.
4. 150 simulations for linear static Analysis.
5. 150 simulations for Modal Analysis.
6. Optimization of conveyor assembly for weight reduction.
7. Comparison between existing and optimized design.

Study of the Existing Assembly of Conveyor System

Total Weight of Existing Conveyor Assembly

Sr.No.	Name of Component	Weight (Kg)
1	C- Channel for Chassis	36.7548
2	Rollers	111.1181
3	Shafts	20.7421
4	Bearing	2.994
5	C- Channel for Supports	20.81
	Total weight of assembly	192.419 kg

Table 2

Geometric Modeling

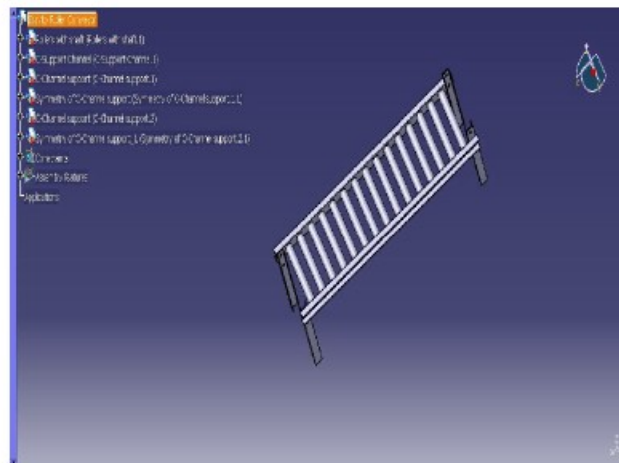


Figure 3: Geometrical modeling using Catia

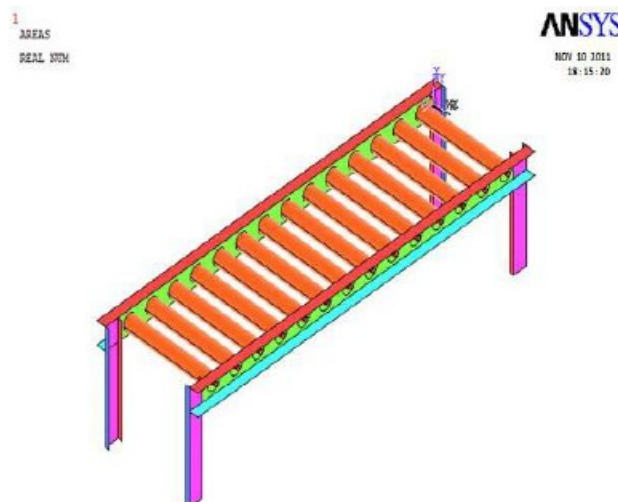


Figure 4: Geometrical modeling using ANSYS APDL codes

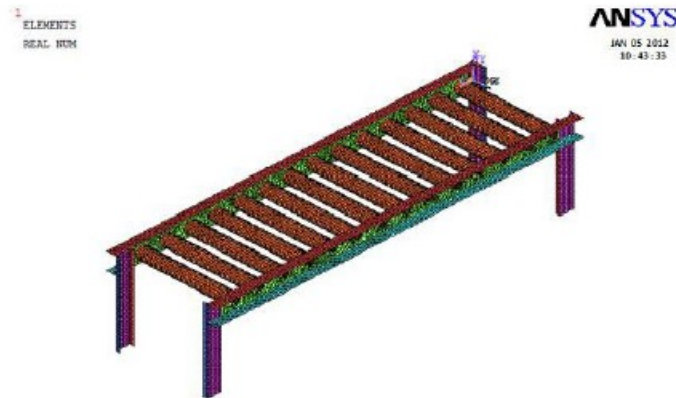
Finite Element Modeling

Figure 5: Finite element mesh of the model

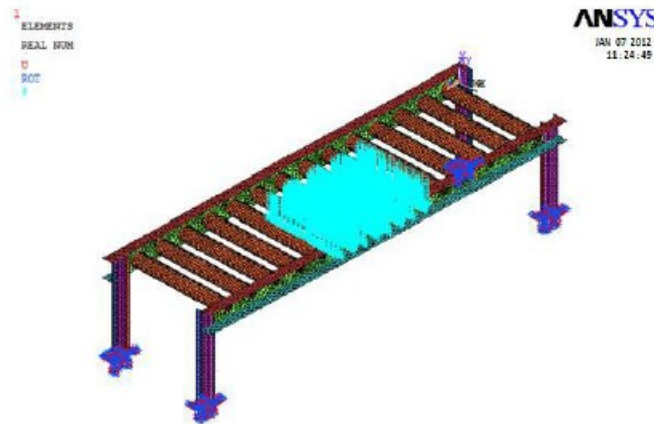


Figure 6: A static load of 3500 N (approx 350 kg) is applied on the 4 rollers at the centre, as the deflection will be maximum, when the load is applied at the centre.

Static Structural Analysis

A static analysis calculates the effect of steady loading condition on a structure, while ignoring inertia and damping effects, such as those caused by time varying loads.

A static analysis can, however, include steady inertia load (such as gravity and rotational).

Design and analysis of roller conveyor for weight optimization & material saving (velocity), and time varying load that can be approximated as static equivalent loads (such as static equivalent wind and seismic loads commonly defined in many building codes). Select element and apply material properties. Static analysis determines the displacements, stresses, strains, and forces in structures or components caused by loads that do not induce significant inertia and damping effects. Steady loading

and response conditions are assumed; that is, the loads and the structure's response are assumed to vary slowly with respect to time.

Critical load condition-

Load act on any four rollers hence by considering 350 kg load act on four rollers maximum deflection, maximum stress values are checked for existing design.

Procedure of Static analysis consists of these tasks

1. Build the Model
2. Set Solution Controls
3. Set Additional Solutions Options
4. Apply the loads
5. Solve the Analysis
6. Review the Results

Results for static analysis,

- Weight = the weight of the model is 193 kg
- Maximum deflection plot shown in Figure 7
- Maximum stress plot

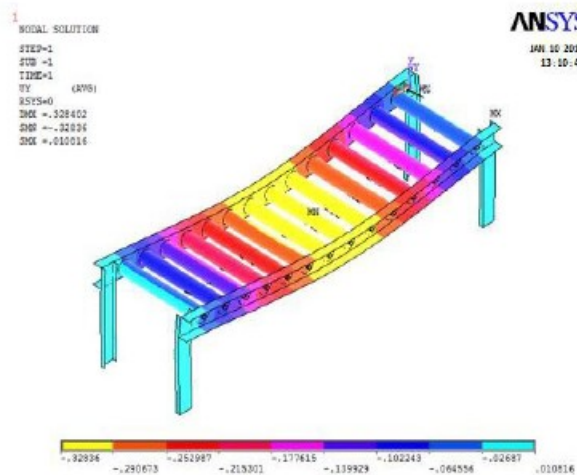


Figure 7: Deflection plot

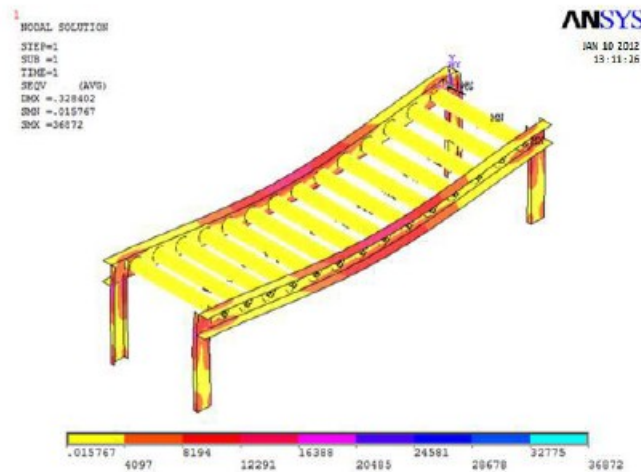


Figure 8: Stress Plot

Modal analysis

- Modal analysis is carried out to find natural frequency and mode shapes.
- As the loading will be in vertical direction (gravity) the mode shape which will show movement in vertical direction is important.

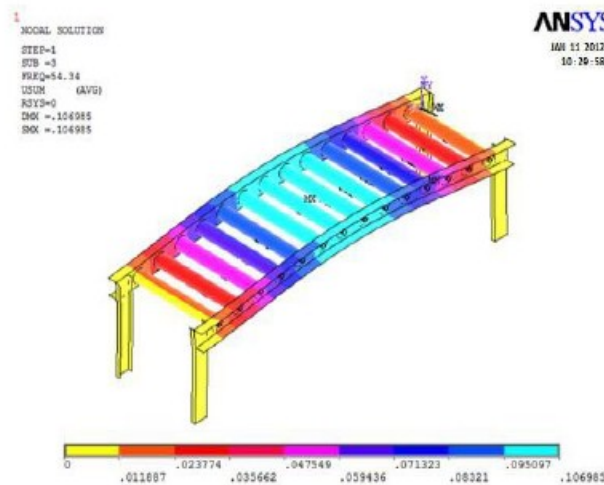


Figure 9: Critical Mode Shape

Result from Modal analysis-

- From the results it is clear that the third mode shape will have maximum motion in vertical direction. So third natural frequency should be greater than the excitation frequency.
- Third natural frequency is 54.34 Hz.

Need of Optimization

As factor of safety of C-Channels and Rollers is very high there is scope of weight reduction in this component.

Selection of Critical Parameter

- Flange Width
- Flange thickness
- Web height
- Web thickness
- Roller Outer diameter
- Roller thickness

APDL Codes for Simulation

- “Do loop” is formed for to calculate effect of critical parameter on various factors like maximum deflection, stress, weight, first, second and third natural frequency.
- For each parameter 25 simulations are carried out.
- Total 150 Simulations carried out.

Optimized design

- Selecting available which is similar to optimized design.
- Select ISJC 100 and ISJC 75 C-channels for chassis and supports respectively
- Roller Outer diameter is 60 mm and roller thickness 5 mm
-

Sr No	Name of Component	Max. Bending Moment (Nm)	Max. Bending Stress N/mm ²	Deflectio (mm)	Actual Factor of Safety
1	C-Channel for Chassis	858.375	34.666	1.108	7.068
2	Rollers	26.8242	9.95	1.605	29.64
3	C- Channel for Supports	224.256	8.1567	0.0501	30.036

Table 3

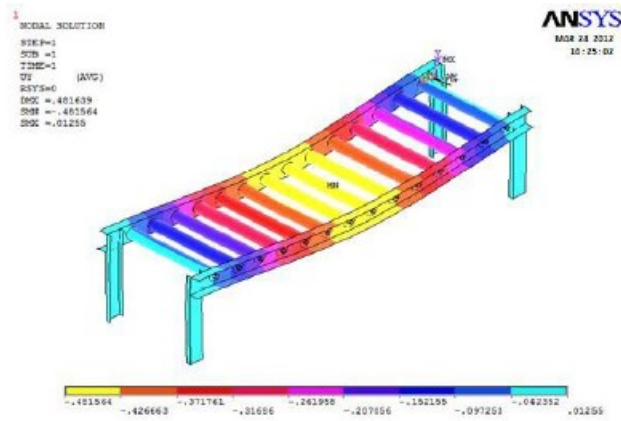


Figure 10: Linear Static Analysis of Optimized design: Deflection plot

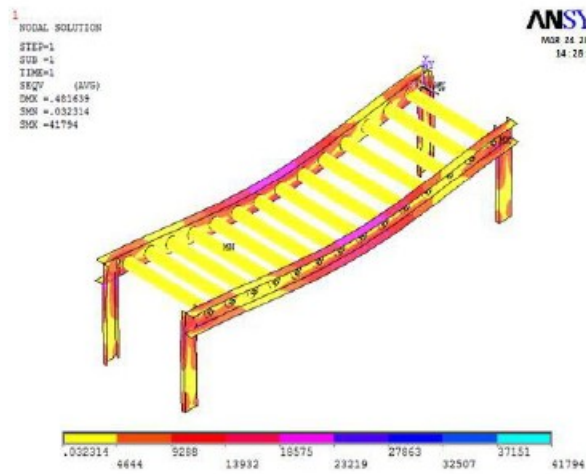


Figure 11: Stress Plot

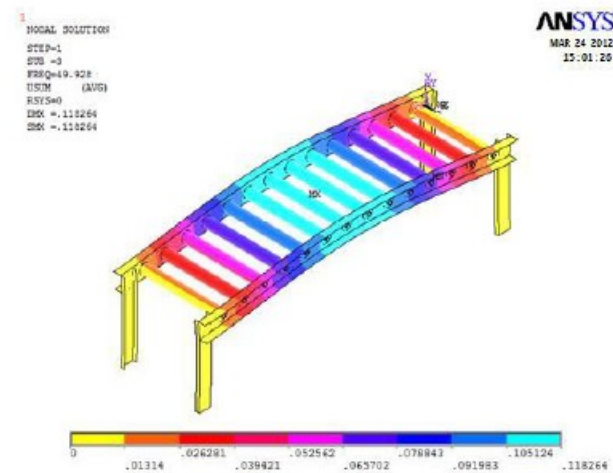


Figure 12: Critical Mode Shape of Optimized design

Results- Effect of Optimized Design:

Sr. No.	Name of Component	Weight (Kg)
1	C-Channels for Chassis	25.020
2	Rollers	71.96
3	Shafts	20.7421
4	Bearings	2.994
5	C-channels for Supports	12.187
	Total Weight of Conveyor	132.9031

Table 4

Design	Max. Def (mm)	Natural Freq. (Hz)	Max. Stress (N/mm ²)
Existing	0.3284	54.34	36.872
Optimized	0.4816	49.928	41.794

Table 5

Weight reduction due to Optimization

Design	Weight (Kg)	% Material required compared To Existing design	% Material save compared To Existing design
Existing	192.419	100	--
Optimized	132.9031	69.069	30.931

Table 6

Conclusion

- Existing design calculation shows the factor of safety is very greater than requirement and there is a scope for weight reduction.
- Critical parameter which reduces the weight is C-channels, roller outer diameter and roller thickness.
- Though value of deflection, stress is more in case of Optimized design, but it is allowable.
- 30.931 % of weight reduction due to Optimized design.

Reference

1. M. A. Alspaugh, "Latest Developments in Belt Conveyor Technology" MINExpo 2004, Las Vegas, NV, USA. September 27, 2004
2. S.H. Masood · B. Abbas · E. Shayan · A. Kara "An investigation into design and manufacturing of mechanical conveyors Systems for food processing", Springer-Verlag London Limited 2004
3. Dima Nazzal , Ahmed El-Nashar "Survey Of Research In Modeling Conveyor-Based Automated Material Handling Systems In wafer fabs" Proceedings of the 2007 Winter Simulation Conference.
4. Chun-Hsiung Lan, "The design of a multi-conveyor system for profit maximization" International Journal Adv Manuf Technol (2003) 22: 510–521.
5. John Usher, John R , G. Don Taylor "Availability modeling of powered roller conveyors".
6. Espelage W, Wanke E. "Movement minimization for unit distances in conveyor flow shop processing",
7. C.Sekimoto "Development of Concept Design CAD System", Energy and Mechanical Research Laboratories, Research and Development Center, Toshiba Corporation.
8. Ying WANG, Chen ZHOU "A Model and an analytical method for conveyor system in distribution centers", J Syst Sci Syst Eng (Dec 2010) 19(4): 408-429.
9. R. Long, T. Rom, W. H"ansel, T.W. H"ansch, J. Reichel "Long distance magnetic conveyor for precise positioning of ultra cold atoms" Eur. Phys. J. D 35, 125–133 (2005).